3X6PRS

3' x 6' INDUSTRIAL SHEET LAMINATE FOR STANDARD THICKNESS

NOMINAL THICKNESSES SHALL BE GIVEN IN THE FOLLOWING TABLE. AT LEAST 90% OF THE AREA SHALL BE WITHIN THE TOLERANCES GIVEN, AND AT NO POINT SHALL THE THICKNESS FROM THE NOMINAL BE A VALUE GREATER THAN 125% OF THIS SPECIFIED TOLERANCE.

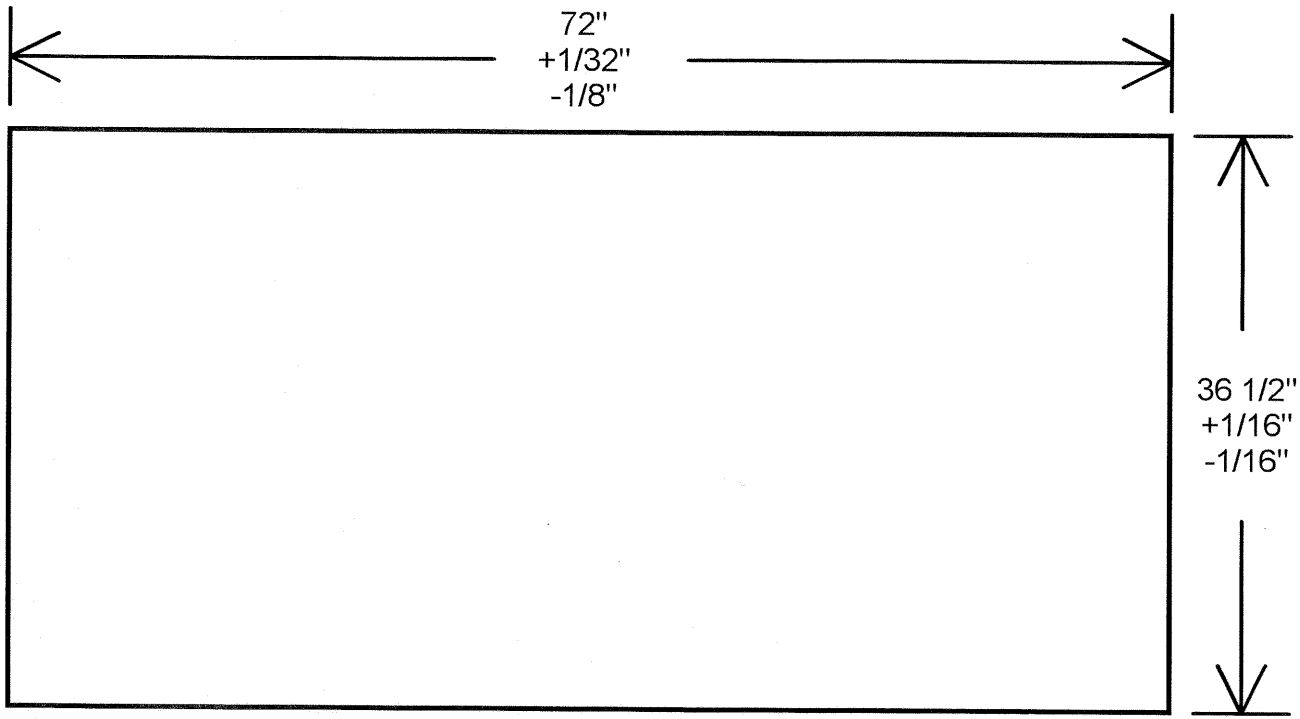

NOMINAL THICKNESS	PLUS / MINUS TOLERANCE	125% OF TOLERANCE
1/32	.024-.038	.023-.039
1/16	.055-.070	.053-.072
3/32	.085-.103	.083-.105
1/8	.115-.135	.113-.137
5/32	.145-.167	.142-.170
3/16	.175-.200	.172-.203
7/32	.205-.233	.201-.236
1/4	.235-.265	.231-.269
5/16	.295-.330	.291-.334
3/8	.355-.395	.350-.400
7/16	.416-.459	.410-.465
1/2	.476-.524	.470-.530
5/8	.598-.652	.591-.659
3/4	.721-.779	.714-.786
7/8	.844-.906	.827-.913
1	.967-1.033	.959-1.041

POLYPLY COMPOSITES INC.

GRAND HAVEN, MICHIGAN 49417

APPROVAL

GENERAL MANAGER — DATE 11/11/97

PLANT MANAGER — DATE 11/11/97

QUALITY MANAGER — DATE 11/11/97

REVISION	DESCRIPTION
A	-1/8" WAS -1/16"
	-1/16" WAS -0